



功能描述:

FCV2系列单向节流阀, 允许油液从1口自由流向2口, 油液从2口流向1口方向有节流作用。

技术数据:

工作压力: 350bar
 工作环境温度: -40°C到+120°C
 建议油液清洁度: ISO 17/15/13
 油液: 矿物油, 粘度等级为VG32, VG46, VG68
 流量: 见下流量特性

最大流量	型号	插孔	A	B	C	安装扭矩
50 L/min	FCV2-08	C08-2	27.0	24.0	12.0	47-54 Nm
30 L/min	FCV2-10S	C10S-2	25.7	27.0	12.9	55-65 Nm

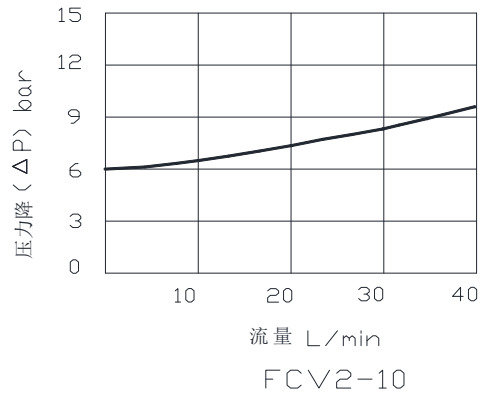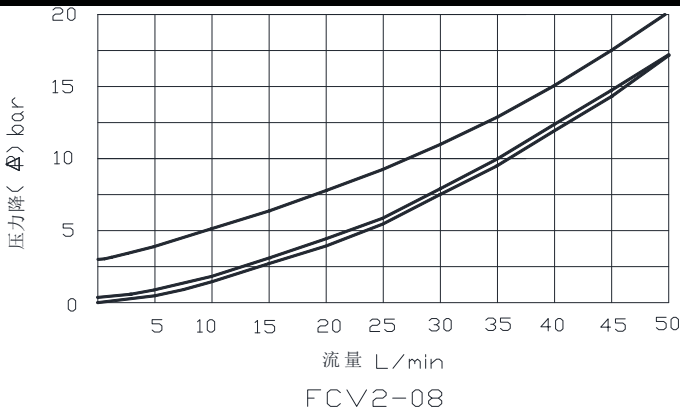

FCV2 — 10S — N — S
 ① — ② — ③ — ④

① **产品系列**
 FCV2 = 单向节流阀,
 2通, 固定节流孔

② **规格**
 08 = 3/4-16 UNF
 10S = 7/8-14 UNF

③ **密封**
 N = 丁晴橡胶
 V = 氟橡胶

④ **节流孔**
 060 = 0.6mm
 070 = 0.7mm
 080 = 0.8mm
 090 = 0.9mm
 100 = 1.0mm
 110 = 1.1mm
 120 = 1.2mm
 * 其它节流孔尺寸可按需订制